

CISCO-0650

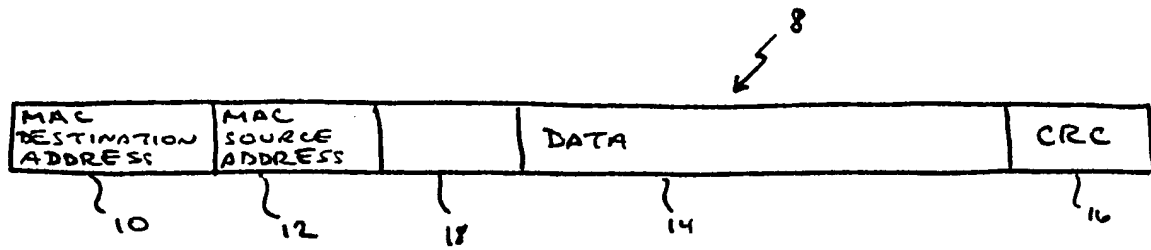


FIG. 1A


CISCO-0650

Byte 0		Byte 1		Byte 2		Byte 3		
4-bit version	4-bit hd len	TOS value <u>26</u>		13_ len (in bytes)				
16-bit identification				3-bit flags	13-bit fragment offset			
<u>TTL</u>		prot_type <u>28</u>		csum				
Source IP address <u>30</u>								
Dest IP address <u>32</u>								
Options (if any)								
Source port number <u>34</u>				Dest port number <u>36</u>				TCP/UDP only
32 bit sequence number								
32 bit acknowledge number								
4-bit hll	Reserved (6 bits)	u	a	p	r	s	f	TCP only
		r	c	k	s	y	n	
16 bit window size								
16 bit TCP checksum				16 bit urgent pointer				

TCP/UDP only

TCP only

FIG. 1B

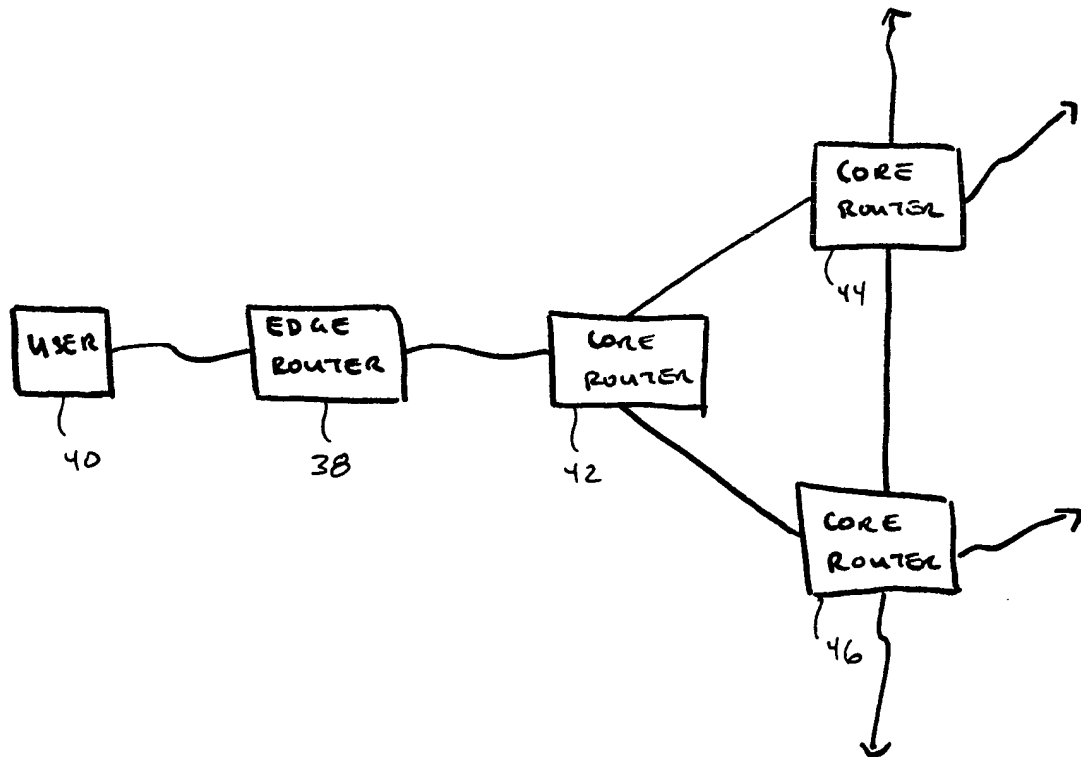FIG. 2

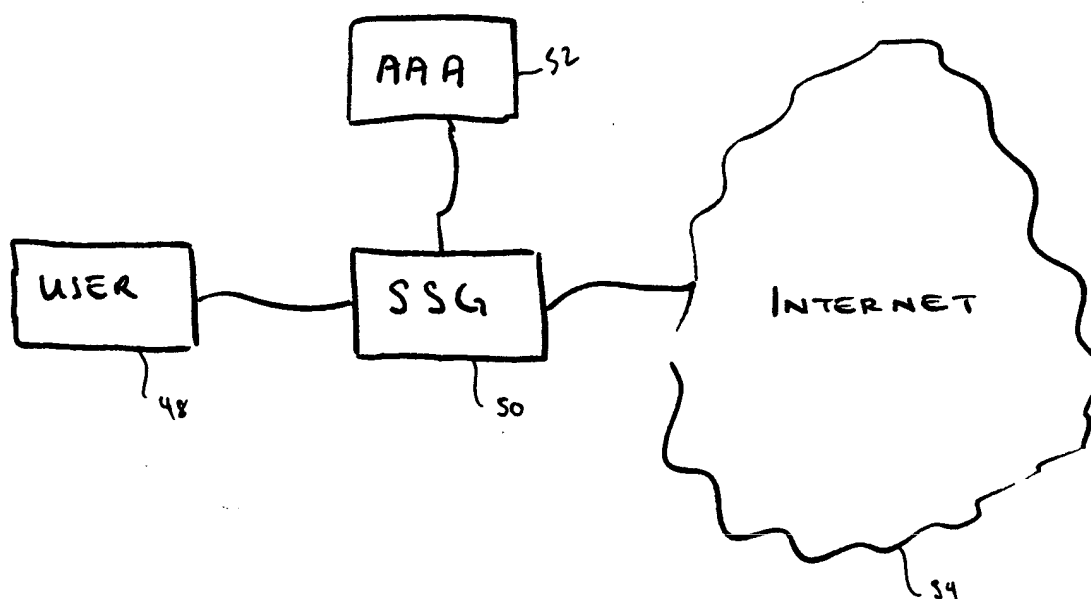
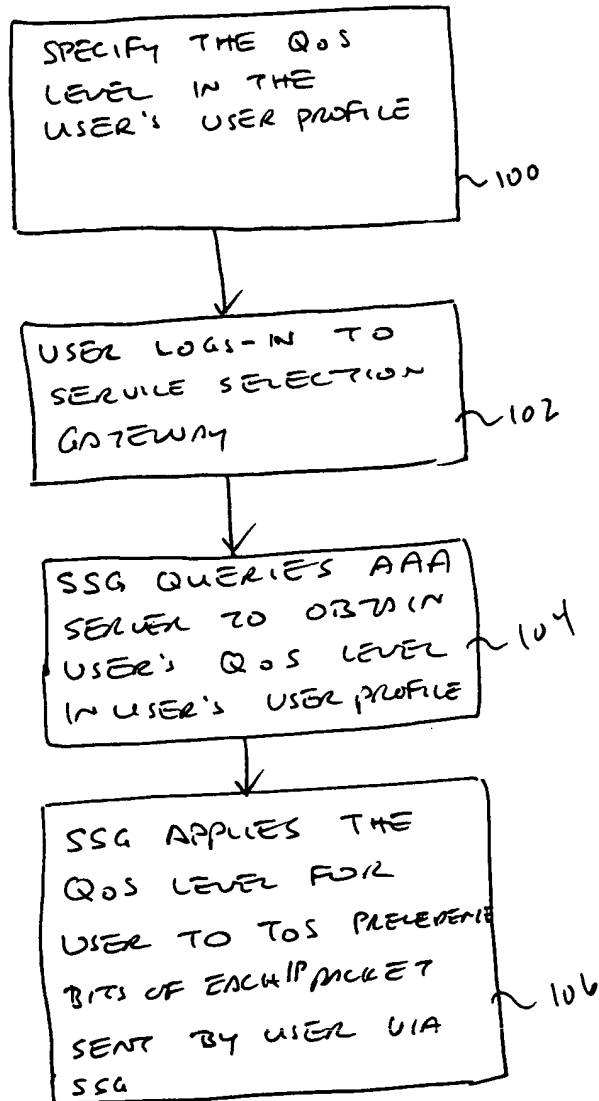
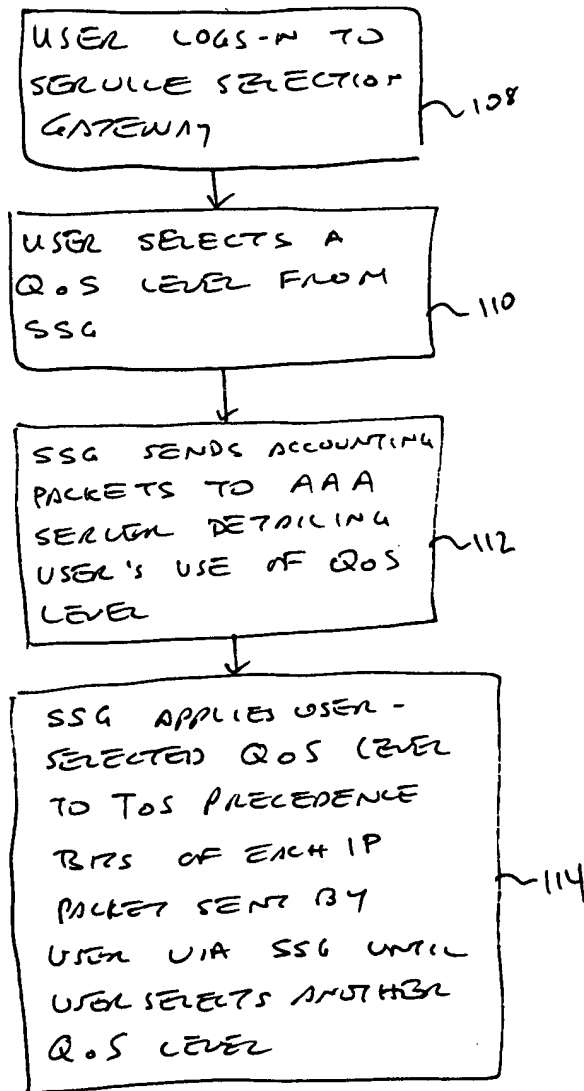


FIG. 3

FIG. 4

FIG. 5